

Y2-R4R-FS3TZ-F073

Cables and Connectors - SpatterGuard Cables



Note: The product images shown may change over time as products are updated.


Part Number

Y2-R4R-FS3TZ-F073


Features

SpatterGuard™ Cables with silicone coated, fiberglass sleeving are the best choice for extra durability in weld cells where cables are exposed to high heat, weld spatter and sharp tools or parts. The protective sleeving is molded right into the connector so there are no gaps for weld slag to penetrate.

Connection



Dimensions

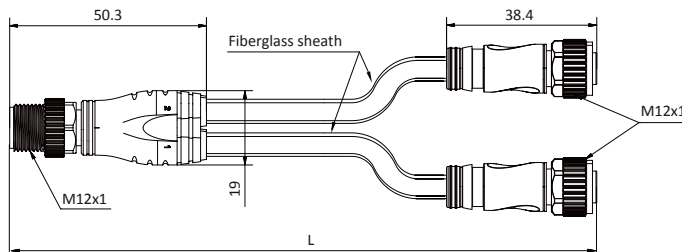

Technical Data

Cable Type	Y-Splitter Cable
Connector A	M12 A-Coded Male Straight
Connector B	M12 A-Coded Female Straight
Length (m)	3 m
Locking System	Screw/Screw
Rated Current	4 Amps
Rated Voltage	250 V
Wire Gauge	3x22 AWG
Shielded	No
Contact Carrier	PUR
Molded Body	PUR
Contact Material	CuZn
Contact Plating	Au
Jacket Type	Hi-Flex PUR with Fiberglass Protective Sleeve
Coupling Nut	Copper Plated PTFE
Protection Class	IP67
Temperature Range	-30 °C to +200 °C



In the USA: 1889 Maryland Ave., Niagara Falls, NY 14305
 In Canada: 3419 Mainway, Burlington, ON L7M 1A9
 Toll Free: 1-800-644-1756 • Fax: 888-283-2127
 service@htmsensors.com

htmsensors.com